



## Two years Call - Off Contract NO. (50/2021) for supply of

- (400V L-L), THREE PHASE ELECTRONIC METER, (5)10 A, Multi Tariff (4 Tariffs), Class 0.5s KWH, Class 1 KVARH, 4-wire C.T operated with cellular **3G -4G** modem.

- Name: .....
- Address: .....
- Telephone / Cellular: .....
- Fax: .....
- Website: .....
- E-Mail: .....
- Contact Person: .....

Tender Document Cost = 60 JD.

Tender summary mentioned in page (4-7) shall be fill by the tenderer, otherwise his tender will not be considered.



# List of Contents

Table 1

<b>No.</b>	<b>Description</b>	<b>Page</b>
<b>1</b>	Cover Page	<b>1</b>
<b>2</b>	List of Contents	<b>2</b>
<b>3</b>	Invitation to Tender	<b>3</b>
<b>4</b>	Tender summary form	<b>4-7</b>
<b>5</b>	General Conditions	<b>8-18</b>
<b>6</b>	Tendering Instructions	<b>19-22</b>
<b>7</b>	General requirements	<b>23-26</b>
<b>8</b>	Inspection and Testing	<b>27-28</b>
<b>9</b>	Form of Bid Bond	<b>29</b>
<b>10</b>	Form of Performance Bond	<b>30</b>
<b>11</b>	Technical specifications	<b>31-50</b>
<b>12</b>	Special Requirements	<b>51</b>
<b>13</b>	Manufacturing and delivery	<b>52</b>
<b>14</b>	Price summary and delivery	<b>53</b>
<b>15</b>	Inspection and main offer Details	<b>54</b>
<b>16</b>	Tender agreement summary	<b>55</b>

**Invitation to Call - Off Contract  
No. (50/2021)**

Dear Sir;

You are kindly requested to tender for the supply of the below mentioned materials as per the quantities and technical specifications enclosed herewith based on call-off basis for a period of two (2) years by filling in the schedules, signing the form of tender, and forward the complete tender documents to the attention of IDECO general manager addressed as seen on the cover page. All bids must be accompanied with a Bid Bond of not less than 5% of the highest alternative offered price valid for 120 days from the closing date, otherwise your tender will not be considered. The bid bond shall be enclosed in the same envelope of the tender and must be delivered to **tenders secretary office located in supplies department** not later than 2 pm (local time) due **August 4, 2021.**

Table 2

Item No.	Quantity (PCS) Within 2 years	Material Description	Stock Code
1	2660	(400V L-L), THREE PHASE ELECTRONIC METER, (5)10 A, Multi Tariff (4 Tariffs), Class 0.5s KWH, Class 1 KVARH, 4-wire C.T operated with cellular <b>3G-4G</b> modem.	6625-2157

**Tender Summary for Tender No. 50/2021**

**These 3 pages must be completely filled out by the bidder; otherwise it may be a reason for exclusion from the bidding competition:**

<b>Name of bidder:</b>		
<b>Address:</b>		
<b>Telephone/Cellular/Fax</b>		
<b>E- Mail</b>		
<b>Contact Person:</b>		
<b>Name of the manufacturer and country of origin:</b>		
<b>The value of the bid bond and the bank issued from:</b>		
<b>The total value of the bid:</b>	<b>Currency</b>	
	<b>Total price</b>	<b>Including tax &amp; fees</b>
		<b>Exclude tax &amp; fees</b>
		<b>exempt</b>
<b>Total price in writing</b>		
<b>Delivery</b>	<b>Ex-works delivery</b>	
	<b>Aqaba port delivery</b>	
	<b>Ideco stores delivery</b>	
<b>Testing</b>	<b>Place of manufacturing</b>	
	<b>Place of testing</b>	
<b>Cost for inspection &amp; testing:</b>		

**Official signature and seal / Bidder**

**Irbid Electricity Company Use:**

**Chairman of the Committee**

**Deputy Chairman of the Committee**

**Committee member**

**Committee member**

**Committee member**

**Committee member**

**Committee member**

**Departures**

<b>Departures from</b>	<b>Technical specifications</b>	<b>Required</b>	<b>offered</b>
	<b>Special requirements</b>	<b>Required</b>	<b>offered</b>

**Official signature and seal / Bidder**

**Irbid Electricity Company Use:**

**Chairman of the Committee**

**Deputy Chairman of the Committee**

**Committee member**

**Committee member**

**Committee member**

**Committee member**

**Committee member**

- 1- **General Condition:** We committed to implementing all items mentioned in the general conditions within the bid document number (      ), and the subcategories of these items.
- 2- **Tendering Instructions:** We committed to implementing all items mentioned in the tendering instructions within the bid document number (      ), and the subcategories of these items.
- 3- **General Requirement (Standards and Regulation):** We committed to implementing all items mentioned in the general conditions within the bid document number (      ), and the subcategories of these items.
- 4- **Inspection and testing:** We committed to implementing all items mentioned in the inspection and testing within the bid document number (      ), and the subcategories of these items.
- 5- **Special Requirements:** We committed to implementing all items mentioned in the special requirements within the bid document number (      ), and the subcategories of these items.
- 6- We committed to fill out all the required pages with the bid documents, without any discrepancies with similar information contained in the Tender Summary.
- 7- We committed that in case there is a difference in the prices provided by us, the lower price will be approval.
- 8- Based on the above we sign.

**Official signature and seal / Bidder**

<b><u>Irbid Electricity Company Use:</u></b>
--

**Chairman of the Committee**

**Deputy Chairman of the Committee**

**Committee member**

**Committee member**

**Committee member**

**Committee member**

**Committee member**

**In case there are any comments or additional terms or other offers by the bidder; it must be mentioned or Brief about it in the summary of this page:**

**Official signature and seal / Bidder**

**Irbid Electricity Company Use:**

**Chairman of the Committee**

**Deputy Chairman of the Committee**

**Committee member**

**Committee member**

**Committee member**

**Committee member**

**Committee member**

# GENERAL CONDITIONS

## 1. Preamble

1.1. These General Conditions shall apply, save as varied by express agreement accepted in writing by both parties.

### 1.2. Definition of Terms:

The "**Purchaser**" shall mean "Irbid District Electricity Co. Ltd." Hereinafter called "IDECO", and shall include IDECO's legal personal representatives and duly appointed engineers. The "**Engineer**" shall mean "Irbid District Electricity Co." Engineers or persons for the time being or from time to time duly appointed in writing by the purchaser to act as Engineer or the purpose of the contract.

The words "approved" and "approval" where used in these conditions or in the specification shall mean "approved by" and "approval of" the purchaser respectively. The "Vendor" shall mean the "Contractor" who's tender has been accepted by the purchaser and shall include the Vendor's. (Contractor's) legal personal representatives, successors and permitted assigns, "**F.O.B. Price**" shall mean the cost of the equipment delivered free on board the ship or truck or aircraft, all port charges and handling charges (also heavy lift if applicable) included .

The contractor must insure the material against all risks from the time it leaves the works until it is placed "F.O.B". "C&F price" shall mean F.O.B. price plus freight including unloading at the port of destination. All Marine Insurance will be affected by the purchaser. The contractor must provide full details of the material to be shipped in good time for IDECO to arrange for Marine Insurance before the material is actually shipped.

"**The call - off purchase order**" means formal request for delivery to be issued by IDECO specifying equipment to be supplied, delivered, and tested by the contractor upon request by IDECO.

"Parties" means IDECO and contactor / vendor.

**2. IDECO will sign a Framework Agreement with successful supplier which governs the relationship between the company and the supplier, and upon signing the agreement. The supplier should submit a design package for each awarded type, in addition a milestone table to be established to determine the durations of supply activities ; i.e : design submittal, FAT advanced notice, release of shipment, ETC; where each purchase order date should be considered as the initial milestone date.**

## 3. Formation of call - off Contract

3.1. The contract shall enter into force upon the date of awarding (hereinafter referred to as the "Effective Date") and shall be valid for 2 years thereafter and until the parties fulfill all their obligations hereunder.

3.2. IDECO has a right during the agreement validity to amend the contract up to extra one year.

3.3. The contract is not a commitment to purchase by the buyer. Commitment to purchase will only be made when IDECO issues an official purchase order under the terms of the agreement.



- 3.4. The call off contract shall remain valid for on – call delivery for a period of two years from the date of signing the contract or until the expiration of the total contract value, whichever occurs first.**
- 3.5. The required materials under this contract shall be required partially in accordance with number of call-off purchase orders during agreement validity for on-call delivery for a period of two years from the date signing agreement, and/or the expiration of the total contract quantity, whichever first occurs.**
- 3.6.** Notwithstanding that the contract and correspondence in connection with the contract shall be in the English language, the contract shall be and be deemed to be a Jordan contract and shall accordingly be governed by and construed according to the laws for the time being in force in the Hashemite Kingdom of Jordan.
- 3.7. Power to Vary The Work:** alternations, amendments, omissions, additions, suspensions, or variations of the work, (hereinafter referred to as "variations") under the contract as shown by the contract drawings or the specification shall be made by the contractor except as directed in writing by the purchaser, but the purchaser shall have full power, subject to the provision hereinafter contained, from time to time during the execution of the contract by notice in writing to instruct the contractor to make such variation without prejudice to the contract and the contractor shall carry out such variations, and be bound by the same conditions, as far as applicable, as though the said variations occurred in the specification. If any suggested variations would, in the opinion of the contractor, if carried out, prevent him fulfilling any of his obligations or guarantees under the contract, he shall notify the purchaser thereof in writing, and the purchaser shall decide forthwith whether or not the same shall be carried out, and if the purchaser confirms his instructions, the contractor's obligations and guarantee shall be modified to such an extent as may be justified. The difference in cost, if any, occasioned by any such variations, shall be added to or deducted from the contract price as the case may require. The amount of such difference, if any, shall be ascertained and determined in accordance with the rates specified in the schedule of prices so far as the same may be applicable, and where the rates are not contained in the said Schedule, or are not applicable they shall be settled by the purchaser and the contractor jointly. But the purchaser shall not become liable for the payment of any charge in respect of any such variations, unless the instruction for the performance of the same shall have been given in writing by him. In the event of the purchaser requiring any variation, such reasonable a proper notice shall be given to the contractor as will enable him to make his arrangements accordingly, and in cases where goods or materials are already prepared, or any designs, drawings, or patterns made or work done that requires to be altered a reasonable sum in respect thereof shall be allowed by the purchaser. Provided that no such variations shall, except with consent in writing of the contractor, be such as will involve an increase or decrease of the total price payable under the contract by more than 25 percent thereof. The power given to the purchaser to make any alteration, amendment, omission, addition or variation to, from or in any part of the works shall include power to vary from time to time the date for the completion of the works or any part thereof.
- 3.8. IDECO shall have the absolute right during the validity of the contract up to the last delivery to increase or decrease the quantity of the items or not to order some items in such manner that does not exceed 25% of the total contract value.**
- 3.9. IDECO has a complete right not to award all items under this contract to one supplier,**

**partial awarding per item or per quantity for a single item might be applicable and the suppliers do not have the right to object.**

**3.10. IDECO has a complete right to substitute certain items instead of other items by increasing or decreasing the required quantity in purchase order.**

**3.11. Precedence:** In the event of any discrepancy or contradiction between the provisions of the conditions of contract and of the specification, the conditions of contract shall take precedence.

#### **4. Drawings and Descriptive Documents**

**4.1.** The weights, dimensions, capacities, prices, performance rating and other data included in catalogues, prospectuses, circulars, advertisement, illustrated matter and price lists constitute an approximate guide. These data shall not be binding save to the extent that they are by reference expressly included in the contract.

**4.2.** Any drawings or technical documents intended for use in the construction of the material or of part thereof and submitted to the purchaser prior or subsequent to the formation of the contract remain the exclusive property of the Vendor. They may not, without the Vendor's consent, be utilized by the purchaser or copied, reproduced, transmitted or communicated to a third party. Provided, however, that the said plans and documents shall be the property of the purchaser.

14.1 If it is expressly so agreed, or

24.1 If they are referable to a separate preliminary development contract on which no actual construction was to be performed and in which the property of the Vendor in the said plans and documents was not reserved.

**4.3.** Any drawings or technical documents intended for use in the construction of the material or of part thereof and submitted to the Vendor by the Purchaser prior or subsequent to the formation of the contract remain the exclusive property of the Purchaser. They may not, without his consent be utilized by the Vendor or copied, reproduced, transmitted or communicated to a third party.

**4.4.** The Vendor shall, if required by the purchaser, furnish free of charge to the purchaser at the commencement of the Guarantee Period, as defined in clause 9, information and drawings other than manufacturing drawings of the material in sufficient detail to enable the purchaser to carry out the erection, commissioning, operation and maintenance (including running repairs) of all parts of the material. Such information and drawings shall be the property of the purchaser and the restrictions on their use set out in paragraph 2 hereof shall not apply thereto. Provided that if the Vendor so stipulates, they shall remain confidential.

#### **5. Materials Packing and Shipping Marks**

All materials, equipment and goods shall be very well packed, in seaworthy containers and/or wooden cases, etc. These should protect the material during shipping, handling, unloading, and for a reasonable period of storage at Aqaba and latter storage at IDECO stores. Packing for indoor materials should be done in such manner as to adequately ensure no ingress of moisture during the shipping and storage periods. Packing of fragile equipment (e.g. including instruments and porcelain) should be done in a way which ensures a reasonable

resistance to impact breakage during transport. Packing shall in general be adequate and in compliance with the best international practice. A descriptive and fully itemized list shall be prepared for the contents of each packing case. A copy of this list shall be placed in a waterproof envelope under a metal or other suitable plate securely fastened to the outside of one end of the case. And its position adequately indicated by stenciling on the case. Where appropriate drawing showing the erection marking of the items concerned shall be placed inside the case, IDECO will supply the successful tenderer with a drawing of its shipping mark for utilization. All packing cases, crates, barrels and drums shall remain the property of the purchaser.

## **6. Inspection and Testing**

- 6.1.** If expressly agreed in the contract, the purchaser shall be entitled to have the quality of the materials used and the parts of the instruments, both during manufacture and when completed, inspected and checked by his authorized representatives. Such inspection and checking shall be carried out at the place of manufacture during normal working hours after agreement with the Vendor as to date and time.
- 6.2.** If as a result of such inspection and checking the purchaser shall be of the opinion that any materials or parts are defective or not in accordance with the contract, he shall state in writing his objections and the reasons therefore.
- 6.3. TESTS:** Acceptance tests will be carried out and, unless otherwise agreed, will be made at the Vendor's works and during normal working hours. If the technical requirements of the tests are not specified in the contract, the tests will be carried out in accordance with the general practice obtaining in the appropriate branch of the industry in the country where the material is manufactured.
- 6.4.** The Vendor shall give to the purchaser sufficient notice of the tests to permit the purchaser's representatives to attend. If the purchaser is not represented at the tests, the tests report shall be communicated by the Vendor to the purchaser and shall be accepted as accurate by the purchaser.
- 6.5.** If on any test (other than a test site, where test on site are provided for in the contract) the material shall be found to be defective or not in accordance with the contract, the Vendor shall with all speed make good the defect or ensure that the plant complies with the contract. Thereafter, if the purchaser so requires, the test shall be repeated.
- 6.6.** Unless otherwise agreed, the Vendor shall bear all the expenses of tests carried out in his works.
- 6.7.** If the contract provides for tests on site, the terms and conditions governing such tests shall be such as may be specially agreed between the parties.

## **7. Passing of Risk**

Save as provided in paragraph 7.6, the time at which the risk shall pass shall be fixed in accordance with the International Rules for the Interpretation of Trade Terms (Incoterms) of the International Chamber of Commerce in force at the date of the formation of the contract.

- 8. Delivery:** Unless otherwise agreed the delivery period shall run from the date of the formation of the contract as defined in clause 2.
- 8.1.** Should delay in delivery be caused by any of the circumstances mentioned in clause 10 or by an act or omission of the purchaser and whether such cause occur before or after the time or extended time for delivery, there shall be granted subject to the provisions of paragraph 5 hereof such extension of the delivery period as is reasonable having regard to all the circumstances of the case.
- 8.2.** If a fixed time for delivery is provided for in the contract and the Vendor fails to deliver within such time or any extension thereof granted under paragraph 2 hereof, the purchaser shall be entitled, on giving to the Vendor within a reasonable time notice in writing, to claim a deduction of the price payable under the contract. Such deduction shall be calculated at the rate of **one half of one percent** of that part of the price payable under the contract which is properly attributable to such portion of the plant as cannot in consequence of the said failure be put to the use intended for each complete week of delay commencing on the due date of delivery, **but shall not exceed a maximum percentage deduction of ten percent from the purchase order value**, Such deduction shall be allowed when a payment becomes due on or after delivery. Save as provided in paragraph 5 hereof, such deduction of price shall be to the exclusion of any other remedy of the purchaser in respect of the Vendor's failure to deliver as aforesaid.
- 8.3.** If the time for delivery mentioned in the contract is an estimate only, either party may after the expiration of two thirds of such estimated time require the other party in writing to agree a fixed time. Where no time for delivery is mentioned in the contract, this course shall be open to either party after the expiration of six months from the formation of the contract. If in either case the parties fail to agree, either party may have recourse to arbitration, in accordance with the provisions of clause 13, to determine a reasonable time for delivery and the time so determined shall be deemed to be the fixed time for delivery provided for in the contract and paragraph 3 hereof shall apply accordingly.
- 8.4.** If any portion of material in respect of which the purchaser has become entitled to the maximum deduction provided for by paragraph 3 hereof, or in respect of which he would have been so entitled had he given the notice referred to therein, remains undelivered, the purchaser may by notice in writing to the Vendor require him to deliver and by such last mentioned notice fix a final time for delivery which shall be reasonable taking into account such delay as has already occurred. If for any reason whatever the Vendor fails within such time to do everything that he must do to effect delivery, the purchaser shall be entitled by notice in writing to the Vendor, and without requiring the consent of any court, to terminate the contract in respect of such portion of the material and thereupon to recover from the Vendor any amount not exceeding that part of the price payable under the Contract which is properly attributable to such portion of the material as could not in consequence of the Vendor's failure be put to the use intended.
- 8.5.** If the purchaser fails to accept delivery on due date, he shall nevertheless make any payment conditional on delivery as if the material had been delivered. The Vendor shall arrange for the storage of the material at the risk and cost of the purchaser. If required by the purchaser, the Vendor shall insure the material at the cost of the purchaser. Provided that if the delay in accepting delivery is due to one of the circumstances mentioned in clause 10

and the Vendor is in a position to store it in his premises without prejudice to his business, the cost of storing the material shall not be borne by the purchaser.

**8.6.** Unless the failure of the purchaser is due to any of the circumstances mentioned in clause 10, the Vendor may require the purchaser by notice in writing to accept delivery within reasonable time. If the purchaser fails for any reason whatever to do so within such time, the Vendor shall be entitled by notice in writing to the purchaser, and without requiring the consent of any court, to terminate the contract in respect of such portion of the material as is by reason of the failure of the purchaser aforesaid not delivered and thereupon to recover from the purchaser any loss, suffered by reason of such failure up to an amount not exceeding the value of the material, the delivery of which has not been accepted.

## **9. Force Majeure**

**9.1.** Notwithstanding the provisions of causes 7, the supplier shall not be liable for forfeiture of its performance security, liquidated damages or termination for default, if and to the extent that, it's delay in performance or other failure to perform its obligations under the contract is the result of an event of Force Majeure.

**9.2.** For purposes of this clause, "Force Majeure" means an event beyond the control the supplier not involving the supplier's fault or negligence. Such events may include, but are not restricted to, acts to the purchaser either in its sovereign or contractual capacity, wars or revolutions, fires, floods, epidemics, quarantine restrictions and fright embargoes.

**9.3.** If a Force Majeure situation arises, the supplier shall promptly notify the purchaser in writing of such condition and the cause thereof. Unless otherwise directed by the purchaser in writing, the supplier shall continue to perform its obligations under the contract as far as is reasonably practical, and shall all reasonable alternative means for performance not prevented by the Force Majeure event.

## **10. Payment:**

### **10.1. Terms of Payment:**

**1. The company prefers to deal with the supplier on an open account basis, and the payment to be made for each purchase order as the following:**

- a. The supplier has to send the following documents: (Invoice origin + five copies), (Certificate of origin + five copies), (Bill of lading 3-negotiable + 5 non-negotiable), (Test certificate (where applicable) + 6 copies), to IDECO company/ financial department, and those document shall be legalized for shipping purposes.**
- b. 100% of Payment will be released within (30) days after the receipt of goods and acceptance at IDECO stores.**
- c. Payment will be released on first week of each month.**

**2. In case the supplier insists on L/C as a method of payment, all /LC charges will be borne by the supplier and charge to his own account for each purchase order and the terms will be as follows:**

- a. The L/C will be confirmed and irrevocable but has to be acceptance L/C and the supplier has to send the following documents: (Invoice origin + five copies), (Certificate of origin + five copies), (Bill of lading 3-**

**negotiable + 5 non–negotiable), (Test certificate (where applicable) + 6 copies), and those document shall be legalized for shipping purposes.**

- b. 100% of Payment will be released after submitting IDECO's acceptance certificate to the bank within (30) days after receipt of goods at IDECO's stores.**
- c. Payment will be released on first week of each month.**

**10.2. Currency of Payment:** The contract price will normally be paid in the currency or currencies in which the price has been stated. The purchaser, however, reserves the right to make payments in the currencies of the countries of origin of goods and services at the exchange rates applicable at the time of payment of the contract price.

**10.3.** Any advance payments made by the purchaser are payments on account and do not constitute a deposit, the abandonment of which would entitle either party to terminate the contract.

**10.4.** If delivery has been made before payment of the whole sum payable under the contract, material delivered shall, to the extent permitted by the law of the country where the plant is situated after delivery, remain the property of the Vendor until such payment has been effected. If such law does not permit the Vendor to retain the property in the material, the Vendor shall be entitled to the benefit of such other rights in respect thereof as such law permits him to retain. The purchaser shall give the Vendor any assistance in taking any measures required to protect the Vendor's right of proper or such other rights as aforesaid.

**10.5.** A payment conditional on the fulfillment of an obligation by the Vendor shall not be due until such obligation has been fulfilled, unless the failure of the purchaser is due to an act or omission of the purchaser.

**10.6.** If the purchaser delays in making any payment, the Vendor may postpone the fulfillment of his own obligations until such payment is made, unless the failure of the purchaser is due to an act or omission of the Vendor.

**10.7.** If delay by the purchaser in making any payment is due to one of the circumstances mentioned in clause 10, the Vendor shall not be entitled to any interest on the sum due.

**10.8.** Save as aforesaid, if the purchaser delays in making any payment, the Vendor shall on giving to purchaser within a reasonable time notice in writing be entitled, and without requiring the consent of any court, to terminate the contract and thereupon to recover from the purchaser the amount of his loss up to the value of the material, the payment for which has been unreasonably delayed.

## **11. Guarantee:**

**11.1.** Subject as hereinafter set out; the Vendor undertakes to remedy any defect resulting from faulty design, materials or workmanship.

**11.2.** This liability is limited to defects which appear during the period (hereinafter called the Guarantee Period) of fifteen months from date of dispatch ex-works or twelve months from the date of setting to work whichever shall be the later.

- 11.3.**In fixing this period due account has been taken of the time normally required for transport as contemplated in the contract.
- 11.4.**In respect of such parts (whether of the Vendor's own manufacture or not) of the material as are expressly mentioned in the contract, the Guarantee Period shall be such other period (if any) as is specified in respect of each of such parts.
- 11.5.**The Guarantee period shall start from the later of the dates mentioned in paragraph 2 above. If however dispatch ex-works is delayed for a period in excess of three months due to a cause beyond the control of the Vendor the Guarantee Period shall not extend beyond eighteen month from the date the material was ready for dispatch ex-works.
- 11.6.**The Guarantee period is based on the continuous use of the material in service for 24 hours every day.
- 11.7.**A fresh Guarantee Period equal to that stated in paragraph 2 hereof shall apply, under the same terms and conditions as those applicable to the original material, to parts supplied in replacement of defective parts or to parts renewed in pursuance of this clause. This provision shall not apply to the remaining parts of material, the Guarantee Period of which shall be extended only by a period equal to the period during which the material is out of action as result of a defect covered by this clause.
- 11.8.**In order to be able to avail himself of his rights under this clause the purchaser shall notify the Vendor in writing without delay of any defects that have appeared and shall give him every opportunity of inspecting and remedying them.
- 11.9.**On receipt of such notification the Vendor shall remedy the defect forthwith and at his own expense. Save where the nature of the defect is such that it is appropriate to effect repairs on site, the purchaser shall return to the Vendor any part in which a defect covered by this clause has appeared, for repair or replacement by the Vendor, and in such case the delivery to the purchaser of such part properly repaired or a part in replacement thereof shall be deemed to be a fulfillment by the Vendor of his obligations under this paragraph in respect of such defective part.
- 11.10.** The Vendor shall bear all the costs and risks of the transport of defective parts or equipment and their replacements.
- 11.11.**Where, in pursuance of paragraph 9 hereof, repairs are required to be effected on site, the conditions covering the attendance of the Vendor's representatives on site shall be such as may be specially agreed between the parties.
- 11.12.**Defective parts replaced according to this clause shall be placed at the disposal of the Vendor.
- 11.13.**If the Vendor refuses to fulfill his obligations under this clause or fails to proceed with due diligence after being required so to do, the purchaser may proceed to do the necessary work at the Vendor's risk and expense, provided that he does so in a reasonable manner.
- 11.14.**The Vendor's liability does not apply to defects arising out of materials provided, or out of a design stipulated, by the purchaser.

- 11.15.** The Vendor's liability shall apply only to defect that appears under the conditions of operation provided for by the contract and under proper use. It does not cover defects due to causes arising after the risk in the material has passed in accordance with clause 6. In particular, it does not cover defects arising from the purchaser's faulty maintenance or erection, or from alterations carried out without the Vendor's consent in writing, or from repairs carried out improperly by the purchaser, nor does it cover normal deterioration.
- 11.16.** Save as in this clause expresses, the Vendor shall be under no liability in respect of defects after the risk in the material has passed in accordance with clause 6, even if such defects are due to causes existing before the risk so passed. It is expressly agreed that the purchaser shall have no claim in respect of personal injury or of damage to property not the subject matter of the contract or of loss of profit unless it is shown from the circumstances of the case that the Vendor has been guilty of gross misconduct.
- 11.17.** The vendor is required to transport all the defective or not in accordance materials, from our stores within a month from date of notification. All costs and expenses of transportation shall be borne by the vendor. Unless otherwise agreed. IDECO has the right to deal with the defective materials in a proper way.
- 11.18.** Gross misconduct "does not comprise any and every lack of proper care or skill, but means an act or omission on the part of the Vendor implying either a failure to pay due regard to serious consequences which a conscientious contractor would normally foresee as likely to ensue, or a deliberate disregard of any consequences of such act or omission.

## **12. Relief:**

- 12.1.** The following shall be considered as cases of relief if they intervene after the formation of the contract and impede its performance: industrial disputes, and any other circumstances (e.g. fire, mobilization, requisition, embargo, currency restrictions, insurrection, shortage of transport, general shortage of materials and restrictions in the use of power) when such other circumstances are beyond the control of the parties.
- 12.2.** The party wishing to claim relief by reason of any of the said circumstances shall notify the other party in writing without delay on the intervention and on the cessation thereof.
- 12.3.** The effects of the said circumstances so far as they affect the timely performance of their obligation by the parties, are defined in clauses 7 and 8. Save as provided in paragraph 7.5, 7.7, and 8.7, if by reason of any of the said circumstances, the performance of the contract within a reasonable time becomes impossible, either party shall be entitled to terminate the contract by notice in writing to the other part without requiring the consent of any court.
- 12.4.** If the contract is terminated in accordance with paragraph 3 hereof, the division of the expenses incurred in respect of the contract shall be determined by agreement between the parties.
- 12.5.** In default of agreement it shall be determined by the arbitrator which party has been prevented from performing his obligations and that party shall bear the whole of the said expenses. Where the purchaser is required to bear the whole of the expenses and has



before termination of the contract paid to the Vendor more than the amount of the Vendor's expenses, the purchaser shall be entitled to recover the excess. If the arbitrator determines that both parties have been prevented from performing their obligation, he shall apportion the said expenses between the parties in such manner as to him seems fair and reasonable, having regard to all the circumstances of the case.

**12.6.** For the purposes of this clause "expenses" means actual out of pocket expenses reasonably incurred, after both parties shall have mitigated their losses as far as possible. Provided that as respects material delivered to the purchaser the Vendor's expenses shall be deemed to be that part of the price payable under the contract which is properly attributable thereto.

**13. Limitation of Damages:**

**13.1.** Where either party is liable in damages to the other these shall not exceed the damage which the party in default could reasonably have foreseen at the time of the formation of the contract.

**13.2.** The party who sets up a breach of the contract shall be under a duty to take all necessary measures to mitigate the loss which has occurred provided that he can do so without unreasonable inconvenience or cost. Should he fail to do so, the party guilty of the breach may claim a reduction in the damages.

**14. Rights at Termination:** Termination of the contract from whatever cause arising shall be without prejudice to the rights of the parties accrued under the contract up to the time of termination.

**15. Arbitration and Law Applicable:**

**15.1.** Any dispute, question or controversy shall arise between the purchaser and the contractor concerning this contract the matter in dispute shall be referred to an arbitration committee composed of three (3) arbitrators. One arbitrator shall be nominated by the purchaser and one by the contractor, and the third arbitrator shall be appointed by both parties. If either party fails to appoint his arbitrator within one month of the appointment of the arbitrator by the other party, or if the two parties fail to agree on the third arbitrator within two months of the date of the request to refer the dispute to arbitration, such arbitrator shall be appointed by the president of the highest court in Jordan at the request of either or both parties.

**15.2.** The decision of the arbitrators shall be final and binding on both the purchaser and the contractor. Any such reference shall conform to the statutory enactment or regulation governing arbitration as may be in force in Jordan at the time. The assessment of costs incidental to the reference and award respectively shall be at the discretion of the arbitration committee.

**16. After Awarding Tenders, winner tenderer will be assessment according to quality of good, delivery period, service after sale, and assessment weight will be considered in coming tenders' evaluation.**

**17. The Irbid Electricity Company shall be entitled to penalize the contractor (late to supply the required materials by tender or tender) the value of the fine due to the Irbid**

**Electricity Company imposed by the Regulatory Authority of the Energy Sector as a result of the company's failure to comply with the required periods in executing the specified subscriber transactions Treatment is the delay of the supplier in the supply of material or materials necessary in the implementation of transactions subscribers.**

**18.** Where the contractor, who was awarded the bid, ceased or failed in implementing the conditions of the bid; IDECO Company has the right to take the appropriate decision on the confiscation of the amount of guarantee or insurance provided by the bidder upon his participation in the tender, In addition, the IDECO company has the right to the restriction of participation of this bidder in all of the company's bids for the duration seen appropriate.

**19. The purchaser has the complete right to reply on contractor's clarifications during 7 days, and during this period there is not exemption from incurred penalty for the event.**

**20. Ordering Procedures and Delivery Period**

**20.1.** IDECO Company prefer Delivery period for each call - off purchase order for the required material within (90-120) day, and the priority will be given to the contractor who decrease the delivery period for purchase orders.

**20.2.** The contractor shall determine the delivery period which should be considered as the contractual delivery period for each call-off purchase order where this period is an important factor during the evaluation and priority should be given to earlier.

**20.3.** The purchaser has to send a final awarded letter for each call-off purchase order containing the final total order value for the required items, enabling the contractor or his representative to pay the stamps fees.

**20.4.** The contractor shall determine the minimum and maximum value per each purchase order, and determine the number of times of purchase orders can be delivered within two years. And the priority will be given to the contractor who minimize the purchase order value and maximize the number of times of purchase orders.

**21. Pricing Formula:**

The supplier shall obligate to deliver the required materials during two years based on the fixed price of the required materials.

## **Tendering Instructions**

1. The Tender shall be made in one copy of the accompanying form; however, all blanks and schedules shall be filled up in ink, and signed without alteration to the form of tender. If any such alteration were made, or if these Instructions were not fully complied with, the tender may be rejected. The tenderer; however, is at liberty to add any further details that he may deem desirable and, in the event of his so doing, shall print or type such details and annex the added matter to the tender submitted by him. Such additional details shall not be binding upon the purchaser unless they shall be subsequently incorporated in the contract.
2. One copy of the tender, and its accompanying documents, filled up as directed, together with the drawings, catalogs, and relevant documents called for, must be enclosed in a secure envelope endorsed (Tender for Contract) No. **(50/2021)** but bearing no other mark from which the identity of the tenderer can be ascertained.
3. All correspondences in connection with this tender and all matters accompanying the tender that are relevant to its examination shall be in English language and expressed in metric units.
4. The tender is to be held open for acceptance or rejection for a validity period of (120) days from the time fixed for opening the tenders.
5. Tenders received prior to the time fixed for opening of tenders will be securely kept, unopened. Tenders received after that time will be rejected. The purchaser bears no responsibility for premature opening of tenders not properly addressed or identified.
6. Tenders may be withdrawn by formal request received in writing from the tenderer prior to the time fixed for opening. If for any reason the tender should be withdrawn after the time fixed for opening and before expiry of the said validity period, the purchaser has the right to retain the full value of the tender bond.
7. The successful tenderer shall abide by the commercial and professional regulations as required by the Ministry of Industry & Trade, Engineering Association and other relevant Institutions in Jordan.
8. Tenderers attention is drawn to the action of customs officers in the discharge of their duties. Whereby air parcels are frequently opened In their own interests and in order to preserve the confidential nature of the tender price, tenderers are urged to pay attention to the:
  - a. To dispatch the completed tender document and any covering letter only by Air Mail which should be endorsed and labeled in the manner laid down in paragraph 10 of the Instructions to Tendering.
  - b. Technical literature and the like may reasonably be sent by Air Parcel or Air Freight but since this would then be separated from the actual Tender, each parcel should contain specific evidence identifying the Tender to which the contents refer.
  - c. The purchaser will not consider late or incompletely delivered tenders or literature supporting tenders due to the action of any customs officer.

9. In the event that the intending signatory does not manufacture one or more of the main sections of equipment and materials, then the tender submitted should give evidence to show that all the obligations imposed by the documents on the intending signatory have been fully understood and accepted, where applicable, by the manufacturer(s) to whom it would be intended to sub-contract one or more of the main sections of the equipment and materials.
10. For overseas transport of the contractor and his Sub-contractors, suppliers and manufactures must give priority to Jordan shipping national lines, and to Arab shipping companies and their subsidiaries for the shipping of goods, materials provided such companies ships call at the port of export. The contractor shall also give priority to the Royal Jordanian Airlines for air freight shipment and transport of personnel.
11. Tenderer must submit country of origin and name of manufacturer for the offered goods.
12. The foreign bidders who participate in this tender must submit their bids through a registered local agent or through their registered office in Jordan.
13. For all manufacturers from inside Jordan it is quite essential that they have JQM for their products and the purchaser will have the right to accept or reject their offer if they did not submit the JQM certificate with their offer.
14. If samples were not re-claimed by the tenderer within 60 days from date of order all samples shall remain the property of the purchaser.
15. The purchaser will not be responsible for, nor to pay for, any expenses or losses which may be incurred by a tenderer in the preparation of his tender.
16. If the tenderer has any doubt about the meaning of any portion of the General Conditions, Specifications, Drawings, he shall clarify such doubts before submitting his tender, or in case of any further information can be obtained by an application in writing to the director general.
17. Tenderers are particularly directed that the amount entered on the form of tender shall be a fixed price for performing the contract strictly in accordance with the bound document, and shall be the sum total of all the amounts printed into and entered by the tenderer upon the schedule of prices.
18. Tender price shall include all incidental and contingent expenses.
19. The tender shall be accompanied by a tender bond in the form of a Bank Guarantee valid for at least 120 days from the time fixed for the closing date of tender, or certified check in favor of and payable to the purchaser for a sum of.....as a guarantee of good faith. This bond is to be issued by any approved bank in Jordan. The bond will be returned to the unsuccessful tenderer within 120 days from the time fixed for opening the tenders or at such earlier time as a tender shall have been accepted by the purchaser. In the case of the successful tenderer, the bond will, subject to the conditions of contract, be returned as soon as a formal contract agreement and a performance bond have been entered into.

20. **The successful tenderer has to submit a performance bond for each call-off purchase order will be issued by the purchaser equal to (10) percent of the total call-off purchase order value within (30) days from date of the final awarded letter for purchase order.**
21. **The performance bond for each call-off purchase order should be valid for period of (15) months from the date of the purchase order.**
22. **If the contractor fails for any reason to submit the required performance bond within (30) days, the purchaser has the right to confiscate the bid bond and any other submitted performance bond, and the awarding letter for issued call-off purchase order will be cancelled too.**
23. **If the successful tenderer fails for any reason to submit the required performance bond within (30) days, the purchaser has the complete right to reserve the value of materials supplied, and payment will not release till the successful tenderer submit the required performance bond. And the bid bond will not return to the tenderer unless the performance bond shall submit to the purchaser according to tender conditions.**
24. **The tenderer shall state in his tender the name or names of the sureties, insurance company, or bank proposed for guaranteeing the performance of the contract.**
25. **Prices are highly recommended to be on the basis of C&F IDECO STORES. However, C&F AQABA port or Amman customs are also accepted.**
26. **Stamp duty and award fees are payable on Jordanian contracts according to Jordanian laws and, after the placing of a contract, it is the contractor's responsibility to purchase legal stamps to the requisite amount depending on the contract value for each purchase order.**
27. **If after receipt of tenders, the purchaser finds any difference between prices shown on the form of tender in writing and in numerals, then the price shown in writing shall be considered correct by the purchaser and the tenderer. If any discrepancies are found between the total in the price schedule and the total obtained by adding the products of each quantity and its particular rate then, whether the price shown on the form of tender in numerals or in writing corresponds or not, the total obtained by adding the products of the quantities and their particular rates shall be considered by the purchaser and the tenderer as the tender price.**
28. **Tender revaluation will be consistent with the terms and conditions set forth in the tender document. In addition to the tender price adjusted to correct arithmetical errors, other relevant factors such as the time of completion of delivery or construction, operating costs where applicable, or the efficiency and compatibility of the equipment, the availability of service and spare parts, and reliability of construction methods proposed will be taken into consideration, to the extent and in the manner specified in the tender documents, in determining the evaluated tender most advantageous to the purchaser. For comparison of all tenders, the currency or currencies of the tender price for each tender will be valued in terms of Jordanian Dinars. The rates of exchange to be used in such valuation will be the selling rates published by the central bank of Jordan and applicable to similar transactions, on the day tenders are opened unless there should be a change in the value of the currencies before the award is made. In the latter case, the exchange rates prevailing at the time of the decision to notify the award to the successful tenderer may be used.**

- 29. The purchaser does not bind himself to accept the lowest or any tender, nor to assign any reason for the rejection of any tender, nor to purchase the whole of the equipment and materials specified. The purchaser has the right to purchase part of the tender, even if it is only one item from the schedule of rates and prices.**
- 30.** The tenderer shall submit with his tender in order of the relevant clauses, a statement of any departures from specifications, or he can fill in the related schedule attached herewith. Notwithstanding any description, drawings, or literature which may be submitted, all details other than those in the statement of departures shall be assumed to be in accordance with the specification.
- 31.** Although IEC standards for workmanship, equipment and materials, have been selected in this specification as a basis of reference, standards and specifications of other countries and recommendations of other international standard organizations will be acceptable provided that they are substantially equivalent to the designated standards and provided further that the tenderer submits for approval detailed specification which he proposes to use.
- 32.** References to brand names or catalog numbers, if any, in this specification have been made only for that equipment for which it has been determined that a degree of standardization is necessary to maintain certain essential features. In certain instances, such references have also been made for purpose of convenience to specify the requirements. In either case offers of alternative goods which have similar characteristics and provide performance and quality at least equal to those specified are acceptable.
- 33.** Where compliance with a specific standard specification is called for the standard specification used shall be that in force at the time of tender.
- 34.** After Awarding Tenders, winner tenderer will be assessment according to quality of good, delivery period, service after sale, and assessment weight will be considered in coming tenders' evaluation.
- 35.** Where the contractor, who was awarded the bid, ceased or failed in implementing the conditions of the bid; IDECO Company has the right to take the appropriate decision on the confiscation of the amount of guarantee or insurance provided by the bidder upon his participation in the tender, In addition, the IDECO company has the right to the restriction of participation of this bidder in all of the company's bids for the duration seen appropriate.
- 36.** The Irbid Electricity Company shall be entitled to penalize the contractor (late to supply the required materials by tender or tender) the value of the fine due to the Irbid Electricity Company imposed by the Regulatory Authority of the Energy Sector as a result of the company's failure to comply with the required periods in executing the specified subscriber transactions Treatment is the delay of the supplier in the supply of material or materials necessary in the implementation of transactions subscribers.

## **General Requirements Standards and Regulations**

- The following general requirements will apply, in so far as they may be applicable, to material to be supplied under this particular contract.

### **1. Design and Construction:**

In complying with the requirements of the specification both with respect to arrangement and detail, design is to conform to the best current engineering practice. Each of the several parts of the material is to be of the maker's standard design provided that this design is in general accordance with the specification.

The essence of design should be simplicity and reliability in order to give long continuous service with high economy and low maintenance cost. Particular attention should be paid to internal and external access in order to facilitate inspection, cleaning and maintenance. The design dimensions and materials of all parts are to be such that they will not suffer damage as a result of stresses under the most severe conditions. Fully detailed specifications of the several parts of the material are to be submitted describing particularly the materials to be used. The materials used in the construction of the material are to be of the highest quality and selected particularly to meet the duties required of them. Mechanisms are to be constructed to avoid sticking due to rust or corrosion. Workmanship and general finish are to be of the highest class throughout. All similar parts of the material are to be interchangeable.

All equipment is to operate without undue vibration and with the least possible amount of noise and is not to cause a nuisance. All equipment is to be designed to minimize the risk of fire and any damage, which may be caused in the event of fire.

The equipment is also to be designed to prevent ingress of all vermin, accidental contact with live parts and to minimize the ingress of dust and dirt. The use of materials, which may be liable to attack by termites or other insects, is to be avoided.

### **2. Compliance with Standards:**

Although the standards for workmanship, material, and equipment have been selected in these specifications as a basis of reference, standards and specifications of the other bank member countries and recommendations of standards international organizations will be acceptable provided they are substantially equivalent to the designated standards and provided furthermore that the contractor submits for approval detailed specifications which he proposes to use. Reference to brand names or catalog numbers if any in these specifications have been made only for that equipment for which it has been determined that a degree of standardization is necessary to maintain certain essential features. And in certain cases such references have also been made for purposes of convenience to specify the requirements, in either case offers of alternative goods, which have similar characteristics and provide performance and quality at least equal to those specified are acceptable. If the contractor offers materials, equipment, design calculations or tests, which conform to standards other than those specified, full details of the differences between the proposed standards and that specified in so far as they affect the design or purpose of the equipment, are to be supplied by the contractor if called upon to do so by the engineer, where required by the engineer for approval purposes, the contractor shall supply, without charge, duplicate copies of the proposed standards with English translations of

the relevant portions. The contractor shall have available in his place of business (or in his supplier's works) the relevant copies of standards or codes used for the use of the Engineer.

### **3. Statutory Regulations**

The materials, equipment and instruments forming part of this contract are to comply in all respect with any relevant local statutory regulations, by laws & orders currently in force.

### **4. Language**

English language shall be used in all documents contained in the tender and in all correspondence between the contractor and engineer. Whenever any thing is required under the terms of the contract to be written marked, printed or engraved, the English language shall be used and duplicated in Arabic except where otherwise provided in this specification.

### **5. Correspondences**

All correspondences on matters arising out of the contract shall be addressed by the contractor to Engineer and not directly to but copied to the purchaser.

### **6. Units of Measurement**

In all correspondence, in all technical schedules, on all drawings and for all instrument scales, SI units of measurement are to be employed. On drawings where IEC or other units have been used it will be in order if the equivalent SI measurement is suitably marked in addition.

### **7. Contractor's Responsibilities**

Unless stated specifically to the contrary in the tender with full supporting explanations, the contractor will be deemed to have concurred as a practical manufacturer with the design and layout of the works as being sufficient to ensure reliability and safety in operation, freedom from undue stresses and satisfactory performance in all other essentials as a working material.

### **8. Compliance with Specification**

Notwithstanding any descriptions, drawings or illustrations which may have been submitted with the tender, all details other than those shown on the schedule of departures will be deemed to be in accordance with the specification and the standard specification and codes referred to therein.

No departures from the specification except those shown on the schedule of departures and approved by the purchaser are to be made without the written approval of the Engineer.

### **9. Drawings and catalogues**

The Tenderer must submit with his offer all the specification indicating rating, weights, and dimension and time current characteristics of the offered materials.

Before the work is put in hand, dimensioned drawings and diagrams showing all details of the material, and materials to be used are to be submitted to the engineer for approval.

No wiring or connection diagrams shall be submitted for approval unless prior approval has been obtained for schematic diagrams, which are to include control and protection schematics showing the facilities being provided and the working of the schemes.

The drawings are to be submitted in quadruplicate and as soon as possible after the commencement date of the contract, and in any case in sufficient time to permit modifications to be made, if such deemed necessary by the Engineer without delay in the delivery of the contract work. The drawings submitted are to be modified as necessary if requested by the Engineer and resubmitted for final approval. If the contractor requires urgent approval of any drawing to avoid



delay in the delivery of the contract works, he is to advise the Engineer accordingly when submitting the drawing. One copy of each drawing and diagram shall be sent direct to the purchaser. It is to be understood, however, that approval of the drawings will not exonerate the contractor from any responsibility in connection with the work. After all items of material have been manufactured and accepted three 35mm negatives of each drawing previously approved is to be provided together with one reproducible on gauge polyester base film or similar and two prints on heavy gauge white paper from such drawings as may be required to show the detail and arrangement of the material as made. All drawings submitted by the contractor or by any sub-contractor are to have the following particulars in the lower right hand corner in addition to the contractor's name:

**IRBID DISTRICT ELECTRICITY COMPANY, CONTRACT NUMBER (50/2021).**

#### **10. Program of work**

Within one month of acceptance of the tender, the contractor is to forward to the engineer four copies of chart detailing the material manufacture and delivery Program for the complete contract work for his comment or approval. Copies of the approved chart, as required by the engineer, are to be provided by the contractor. The chart is to indicate the various phases of work for all items of the contractor from the commencement of the contract to its final completion, e.g. design, ordering, of materials, manufacture and delivery. If at any time during the execution of the contract it is found necessary to modify the approved chart, the contractor is to inform the engineer and submit a modified chart for approval. Such approval is not to be deemed to be consent to any amendment of the completion date stated in the schedule.

#### **11. Progress Report and Meetings**

##### **a. Progress Reports**

At monthly intervals after approval of the Program chart, the contractor is to submit to the Engineer and the purchaser written detailed progress reports in triplicate in an approved form, indicating the stage reached in the design, ordering of material, manufacture and delivery of all components of the material. The reports should include details of any delays and the remedial action proposed. These reports are to be forwarded promptly so that on receipt by the engineer the information contained therein is not more than seven days out of date.

##### **b. Meeting:**

If during the execution of the contract the Engineer considers the progress position of any section of the work to be unsatisfactory, he will be at liberty to call such meetings, either in Irbid office, or at the contractor's work, as he deems to be necessary. If required by the Engineer a responsible representative from the contractor's works is to attend such meetings. Access to the contractors and sub-contractor's works is to be granted to the engineer at all reasonable times for the purpose of ascertaining progress.

#### **12. Packing**

Each item to be packed properly or protected for shipment and be capable of sustaining heavy handling during transportation from the place of manufacture to the purchasers stores in Irbid and hence to site and to be suitable for storage for a period of 6 to 12 months after to site.

Tube ends and other similar open ends are to be protected from both external damage and ingress of dirt and moisture during transit and while at purchaser's stores. Flanged pipes are to have their open ends protected by adhesive tape or jointing and then be covered with a wooden blank flange secured by service bolts. Precautions are to be taken to protect shafts and journals

where they rest on wooden or other supports likely to contain moisture. At such points, wrappings impregnated with anti-rust composition or vapor phase inhibitors are to be used with sufficient strength to resist chafing and indentation due to movement which is likely to occur in transit. Protective wrappings and impregnation are to be suitable for a period of three months. In the case of ball or roller bearings installed in any items of material, precautions are to be taken to avoid indentation of the bearing races.

Metal bindings of cases are to be of corrosion resistant material position with struts or cross battens and not with wood chocks wedged in place, unless they are fastened firmly in place. All struts or cross battens are preferably to be supported by cleats fixed to the case above and below to form ledges on which the batten may rest. Cases are to be unopened after packing to prove that there is no movement of contents.

Where parts are required to be bolted to the sides of the case, large washers are to be used to distribute the pressure and the timber is to be strengthened by means of a pad.

Where practicable, all indoor items such as electric motors, switch and control gear, instruments and panels, machine components, etc., are to be cocooned or covered in polyethylene sheeting, sealed at the joints and the enclosure provided internally with a desiccator. Each crate or package is to contain a packing list in a waterproof envelope. All items of material are to be clearly marked for easy identification against the packing list. All cases, packages, etc. are to be clearly marked on the outside to indicate the total weight, to show where the weight is bearing and the correct position of the slings and are to bear an identification mark relating them to the appropriate shipping documents. Stencil marks on the outside of casings are to be indelible. The Engineer may require inspecting and approving the packing before the items are dispatched but the contractor is to be entirely responsible for ensuring that the packing is suitable for transit and such inspection will not exonerate the contractor from any loss or damage due the faulty packing.

# Inspection and Testing

## 1. **General Requirement**

The whole of the material by the contract will be subject to inspection and testing by the engineer during manufacture and on completion. The approval of the engineer or the passing of any such inspection or test will no, however; prejudice the right of the purchaser to reject the material if it fails to comply with the specification when erected or to give complete satisfaction in service. The costs of all tests and inspection shall be borne by the contractor and shall be deemed to be included in the contract price. Before any material is packed or dispatched from the main or sub-contractor's works, all tests called for are to have been successfully carried out in presence of the engineer.

Adequate notice shall be given when the material is ready for inspection or test and every facility shall be provided by the contractor and his inspection and his sub-contractors to enable the Engineer to carry out the necessary inspections and tests.

Triplicate copies of all principal test records and test certificates shall be supplied to the Engineer for all tests carried out in accordance with the provisions of the contract.

## 2. **Sub-Contractors**

Within two months of acceptance of the tenders the contractor shall forward to the engineer a list of all sub-orders placed or intended. The contractor shall submit three copies of all sub-orders or selected by the engineer for progress or inspection. One copy of all drawings referred to in the sub-order is to be submitted unless otherwise agreed by the engineer. The drawings and sub-orders submitted to the engineer will cover all major components which are subject to electrical and mechanical pressure or stress when the material is in operation and also auxiliaries and stores which will be dispatched to site direct from the sub-contractor's work. For the purpose of this clause inter-works orders are to be treated as sub-order. Sub-orders are to include a statement advising the sub-contractor that the items being order will be subject to inspection and test by the Engineer. It is important that all copies of such orders are clearly marked with the main contractor's name and the following reference:

**IRBID DISTRICT ELECTRICITY Co. CONTRACT No (50/2021).**

Sub-Contractors are to comply with all the applicable requirements of this specification. Orders issued by the sub-contractor are also to include the main contractor's reference on their sub-order in addition to the above-mentioned heading.

## 3. **Material Tests**

The contractor shall provide test prices as required by the engineer to enable him to determine the quality of the material supplied free of charge and any cost of the tests shall be borne by the contractor. If any test pieces fails to comply with the requirements of the appropriate specifications for the material in question, the engineer may reject the whole of the material represented by that piece, the contractor's designers and metallurgists will be consulted before any material is so rejected. In the event of the engineer being furnished with the certified particulars of the tests which have been carried out for the contractor by the suppliers of the material, he may, at his own discretion, dispense with the previously mentioned tests entirely.

#### **4. Tests at Manufacture's Works**

Works tests shall include all routine, electrical, mechanical and hydraulic tests in accordance with the relevant IEC standard or other standard may be approved except where departures there from and modifications thereto are embodied in this specification. For material not covered by an IEC or British standard or specifically mentioned in this specification the tests shall be agreed with the Engineer. After satisfactory completion of the witnessed tests at the works, the material shall be submitted for the engineer's approval preparatory to shipping. No item of material is to be dispatched to site until the Engineer has given his approval in writing.

#### **5. Test Certificates**

Triplicate sets of all principal test records test certificates and performance curves shall be supplied for all tests carried out in accordance with the provisions of this contract. These test records, certificates and performance curves shall be supplied for all tests, whether or not they have been witnessed by the engineer. The information given in such test certificates and curves shall be sufficient to identify the material or equipment to which the certificates refers and should also bear the contract reference and heading as given in clause 7.2 of this section.

#### **6. Rejection of Plant**

IF Any item of material or component which fails comply with the requirements of this specification in any respect whatsoever at any stage of manufacture, test, erection or on completion at site may be rejected by the engineer either in whole or in part as he considers necessary, and after adjustment or modification if so directed by the Engineer, the contractor shall submit the item for the item for the further inspection and / or test. In the event defects of such a nature that the requirements of this specification cannot be fulfilled by adjustment or modification shall be replaced by the contractor, at his own expense, to the entire satisfaction of the engineer.

#### **7. Maintenance**

The contractor is to guarantee the efficient and good working of the material supplied under the contract for a period of twelve months (Gregorian) from the date of delivery of the material to Irbid, in accordance with the General conditions of contract.

#### **8. Tests**

All tests meet the requirements of latest international standard mentioned in the contract or any relevant standard.

**Irbid District Electricity Co.**

**Form of Bid Bond**

**Tender No. (50/2021)**

Dear Sir,

We are pleased to inform you that we guarantee M/S .....  
for the amount of.....in order to allow them to submit an  
offer for the due performance of the undertaking and obligation as specified in their Tender for  
Contract No. ....This Guarantee shall remain valid for a period of one hundred  
twenty days from the time fixed for opening the Tenders by IRBID DISTRICT ELECTRICITY CO.  
LTD.

This Guarantee shall be free from any interest and will be extended or paid in cash upon your  
first request in any or required, without the need for natural warning or judicial proceedings and  
without any rights to delay, oppose, or stop payment on our part, or on the part of the Tenderer or  
any of his representatives whom over. This Guarantee shall be deemed valid until the submittal of  
a duly executed Performance Bond.

**Signed.....Bank (Surety)**

**Irbid District Electricity Co. Ltd.**

**Form of Performance Bond**

**Tender No. (50/2021)**

Dear Sirs,

At the request of ..... bank (the Foreign Bank) and on behalf of M/S..... Contractor's Name and Address), we..... Bank (the Local Bank) issue in your favor our irrevocable and unconditional Performance Bond No.....in the amount of..... (In word), in this connection we ..... Bank (the Local Bank) hereby consider ourselves responsible forth unconditional payment to you or to your authorized representatives of the above sum on your first written demand in whole or in part notwithstanding any objections on the part of the above named contractor and without any need for natural warning or judicial proceedings.

This Bond will expire on ..... and shall be renewed automatically for a period of ..... months and for consecutive similar periods until it is returned by you to us.

**Signed** ..... **Bank (Surety)**

❖ **(400V L-L), THREE PHASE ELECTRONIC METER, (5)10 A, Multi Tariff (4 Tariffs), Class 0.5s KWH, Class 1 KVARH, 4-wire C.T operated with cellular 3G-4G modem.**

Reference Standard: International Standard specifications IEC 62052/53 or an equivalent IEC specification.

Any additional features on the offered meter which not mentioned or requested in our tender will go through IDECO's study and analysis by IDECO engineers to be evaluated and it could considered a deviation.

• **Climate Conditions:**

The following is applicable unless otherwise is mentioned in our tender:

- |  |                            |
|--|----------------------------|
| 1. Maximum Ambient Temperature   | 75 °C                      |
| 2. Minimum Ambient Temperature   | -10 °C                     |
| 3. Design temperature  | 45 °C                      |
| 4. Maximum daily range of air temperature  | 20 °C                      |
| 5. Maximum Wind Pressure   | 420 n/m <sup>2</sup>       |
| 6. Ice Thickness   | 10 mm.                     |
| 7. Snow Falls  | 1-4 days – 30 cm.          |
| 8. Site altitude   | 0-1400m ASL                |
| 9. Average annual rainfall   | 40cm during November–April |
| 10. Relative humidity in the range   | 90%.                       |
| 11. Average number of thunder storms   | 15 days / year             |
| 12. Prevailing wind winter average daily approximately 5-8 m/s, with gust up to 30m/s.                             |                            |
| 13. Summer wind average afternoon 10-13 m/s, during morning generally light and variable, gust speed up to 30 m/s. |                            |

**1. Meter rated parameters:**

The three-phase meter shall be of Class 0.5s for indoor and outdoor domestic applications with:

- Rated current of 5-10 A
- Rated Voltage of 400 ± 10% V (L-L)
- Frequency 50 HZ
- Electromagnetic Compatibility of 15kV according to IEC61000-4-2
- Electromagnetic RF Fields 80MHz-2GHz, typical 30 V/m according to IEC61000-4-3
- Fast Transient Burst 4 kV for main circuits, 2 kV for auxiliary circuits, to IEC61000-4-5
- Insulation strength of 4kVAC at 50Hz for 1 minute
- Insulation strength Pulse Voltage 1.2/50microsec, 8kV main circuits, 6 kV auxiliary circuits according to IEC 62052-11
- Impulse withstands voltage of (8kV)
- **The meter accuracy must be equal or less than 0.5 % in all accuracy tests (different value of current and power factor)**

## **2. Meter tariff, billing and display:**

- 2.1. (400V L-L), Three Phase Electronic Meter, (5)10 A, Multi Tariff (4 Tariffs), Class 0.5s KWH, Class 1 KVARH, 4-wire C.T operated, with 12 seasons and 12 maximum demand /year. High accuracy and long-term measurement stability.
- 2.2. Active energy (import, export), as IEC 62053-22, IEC 62053-21, class 0.5s
- 2.3. Reactive energy (4 quadrants and combined quadrants), IEC 62053-23, class 1.
- 2.4. Current average, maximum and cumulative demand measurement
- 2.5. Instantaneous and historical measurements of V, I, PF, phase angles, demands, frequency...etc.
- 2.6. The meter shall measure the import active energy with daily rates (up to four rates).as well as for export active energy and the purchaser shall have ability to easily configure these four rates at the desired times of day.
- 2.7. The meter shall be able to provide historical data, (billing periods for not less than 12 months). .
- 2.8. The meter shall have the ability to measure the energy (Import and export) even if the one phase is importing energy and other phases are exporting. To be approved by IDECO engineer.
- 2.9. The current sensors inside the meters must be CT based sensor and not shunt sensor.
- 2.10. Tenderers are requested to quote meter with a maximum demand, the meter shall be able to be programmed to activate the maximum demand within the specified daily period for a specific season. So the meter shall be able to be programmed so that the year will be divided into seasons (up to 12 seasons, dates are changeable every year) and the maximum demand shall be activated in a specified daily-period of times (also changeable) for each season. And record the maximum demand in a specific register and with the ability to show it on the LCD, the maximum demand interval should be programmable and the default setting is 30 minutes.


The maximum demand is not the instantaneous maximum value for each interval it has an equation and it shall be computed as follows:

$$\text{The Demand For Each Interval (KW)} = \frac{\text{The Energy in This Interval (KWH)}}{\text{Time of Interval (H)}}$$

Our interval is always 30 minutes = 0.5 Hour.

For example if the power is 50 KW for the first 15 minutes and 0 KW for the second 15 minutes.



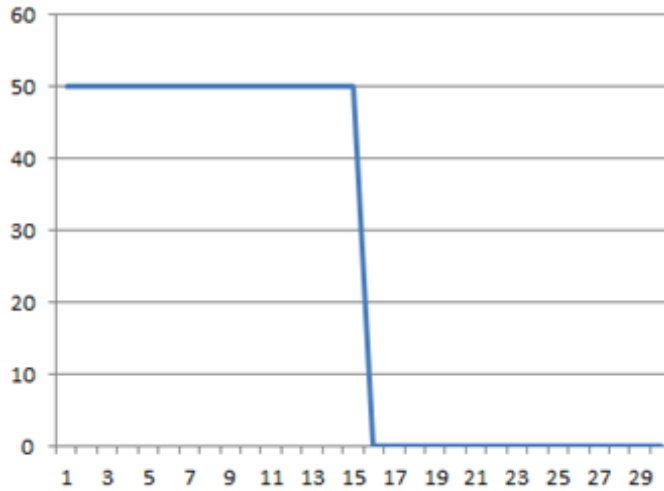

The Energy for This Interval =  $50 \text{ KW} \times 0.25 \text{ H} = 12.5 \text{ KWH}$

$$\text{The Demand for This Interval (KW)} = \frac{12.5 \text{ KWH}}{0.5 \text{ H}} = 25 \text{ KW}$$

- Optional demand metring allows billing based on maximum demand

- 2.11. The meter shall store the load profile in the meter memory. And the purchaser shall be able to choose any item listed in the O.B.I.S code using the software, and to configure the time interval for these readings (interval may differ from one channel to another). The default time interval is 30 minutes.
- 2.12. All of the measurement and registers shall be compatible with Obis-Code registers, and the meter shall have the ability to show any stored register on the LCD, and the OBIS code should be shown with the registers on LCD, For example, import active energy (1.8.0), last month import active energy (1.8.0.1), and that should be approved by IDECO.
- 2.13. The meter shall include a built-in RTC (Real Time Clock) of base time shall be taken from crystal oscillator. To provide the time and date for the meter and display it on the LCD and use it to meet the tariff scheme mentioned in item (2.6), the historical readings mentioned in item (2.7), the maximum demand in item (2.10), the load profile in item (2.11) , and any other needs. And it shall continue to operate during power failure.
- 2.14. The meter's register shall reset to Zero after reaching the maximum range 9999999.9 and all digits should always appear. And not be permitted to reset to zero under any circumstances. Before reaching the maximum range.
- 2.15. A programmable auto cycle display with a programmable switch-over (0-30 sec.) between the different registers must be provided and it should be programed separately from the push button option.

The default setting for the auto cycle display is:  
15.8.0 Total absolute active energy

And for the push button is:

Number	OBIS code	Description
1.	15.8.0	Absolute active energy (A+) total [kWh]
2.	1.8.0	Import active energy (A+) total [kWh]
3.	2.8.0	Export active energy (A-) total [kWh]
4.	16.8.0	Sum active energy without reverse blockade (A+ - A-) total [kWh]
5.	1.6.0	Import active maximum demand (A+) total [kW]
6.	32.7.0	Instantaneous voltage (U) in phase L1 [V]
7.	52.7.0	Instantaneous voltage (U) in phase L2 [V]
8.	72.7.0	Instantaneous voltage (U) in phase L3 [V]
9.	31.7.0	Instantaneous current (I) in phase L1 [A]
10.	51.7.0	Instantaneous current (I) in phase L2 [A]
11.	71.7.0	Instantaneous current (I) in phase L3 [A]
12.	0.9.1	Current time (hh:mm:ss)
13.	0.9.2	Date (YY.MM.DD or DD.MM.YY)
14.	13.7.0	Instantaneous power factor

- 2.16. The meter shall indicate on the LCD the availability of the three phases and the loss of any phase. And the direction of each current (imports or export).
- 2.17. The meter shall support daylight saving according to Jordanian standard. And it shall be possible to change date, time as well the tariff program with laptop,
- 2.18. A high contrast, fully electronic and digital Liquid Crystal Display (LCD) must be provided with light illumination which should be on from first button and uses information on the display to indicate the active element.(the back light should be not work if the meter have of grid )
- 2.19. The display should be very clear (day and night) with not less than 8 (7+1) digits excluding the hidden 4 decimals for testing, and all main digits should be continuous showing on the screen
- 2.20. The meter shall provide daily information on meter readings with multi tariffs registers (import and export) with maximum demand.
- 2.21. The digit dimension is must be clear to the user's eyes.
- 2.22. The meter preferred to be equipped with an last minute power storage that enables meter to save it's data into memory and to enter the low power mode
- 2.23. **POWER QUALITY ANALYSIS:**
  - Long and short outage detection with configurable time threshold.
  - Voltage sags and swells detection with configurable voltage and duration thresholds.
  - THD event detection with analysis up to 10<sup>th</sup> harmonic to reveal unusual conditions.

### **3. Meter Hardware:**

- 3.1. A push button for reading the display manually must be provided. And this list of registers shall be separate from the auto cycle mentioned in Item (2.15).
- 3.2. The meter shall have the facility to be read even if the power is not present.
- 3.3. The battery shall be changeable easily (inside sealed cover) and the lifetime shall not be less than 15 years which has to be approved. And the meter shall continue to operate even if the battery is lost for any reasons. The battery should not be used if the meter is connected to power.
- 3.4. The lifetime of the offered meter has to be not less than (20 years) which has to be confirmed by an official certificate. Including LCD.
- 3.5. During the meter lifetime it doesn't require any calibration or maintenance, stability of meter accuracy should be guaranteed. The lifetime of the meter has to be confirmed by an official organization. A certificate to this effect has to be provided.
- 3.6. The meter preferred to be equipped with three LED's operation:
  - 3.6.1 Active Energy Impulse LED for meter testing, and the meter constant shall be in from of impulse/ KWh.
  - 3.6.2. Reactive Energy Impulse LED for meter testing, and the meter constant shall be in from of impulse/ KVARh.
  - 3.6.3. Alarm LED and all LED's should have enough distance from other LED to eliminate any effect on test operation.
- 3.7. The meter shall have a case which provides an ingress protection rating of IP54 in accordance with IEC 60529:1989 with extended terminal cover having rigid and homogeneous thickness without knock out grooves (weak areas) to prevent access to the feeding wires.
- 3.8. The enclosures of meters should be capable of being easily sealed with lead and two steel wire seals (the seals will have supplied and installed by IDECO as per our stander with 1mm diameter for each), one of them is a large plastic sealed with diminutions of 2.25 cm \*2.75 cm \*2cm, and the hole shall be with suitable size for using two wire seals easily.
- 3.9. The extended terminal cover shall be capable of being easily sealed with lead and wire large plastic seal to prevent any accessing to the feeding wires.
- 3.10. Materials of the main cover of the meter shall be non-transparent and the terminal cover shall be clear transparent, both cover must be high resistive to fire hazards. It should be of sufficient strength to protect the working parts and to be adequate to protect the meter against mechanical injury. It shall not be affected by chemical materials used for cleaning purposes specially the meter's LCD. The quality of materials should be fully complying with the all tests according to IEC.
- 3.11. The meter should be of the front- connected type with a hanging device provided and fitted on the base compatible with modern test rack fixings.
- 3.12. The equipment in this specification should be capable of accepting any size of conductor in the range 1.5 mm<sup>2</sup> up to 6 mm<sup>2</sup> of stranded copper or Aluminum conductor PVC or XLPE insulated and it should be compatible with our test bench.

3.13. Terminals of the meters shall be arranged as the following:

1	2	3	4	5	6	7	8	9	10	11
PH1	PH1	PH1	PH2	PH2	PH2	PH3	PH3	PH3	N	N
S1	V	S2	S1	V	S2	S1	V	S2		

Reading left to right when facing the front of the meter case.

- 3.14. The width of the terminal block shall not exceed 170 mm and according to DIN, 43857. The terminals shall be made of bimetallic material (Nickel-coated brass) to enable a good electrical contact in hot and humid conditions. The fixing screws shall also be bimetallic material nickel-coated brass to enable a good contact and prevent loosening at heat. And the terminal should be compatible with our test bench (Zera, MT). The screws must be made of bimetallic material to support automatic drill without any damage.
- 3.15. The meter base, terminal cover of extended type and main cover should be made of suitable rigid plastic material of adequate mechanical and insulation qualities and the meter connection drawing should be provided under terminals cover.
- 3.16. Each supplied meter shall have a serial number as our stander for numbering printed in numbers and bar-code 128 Type-C on property plate at the front of the meter to be easily read by IDECO hand held unit "Bar-Code reader". The serial number should be parameterized inside each meter to express its unique identity by manufacturer.
- 3.17. The tenderer must state the power consumption for the meter with its internal circuits. And also state the power consumption for every compatible modem.
- 3.18. **TERMINAL BLOCK AND COVER:**

- The width of the terminal block shall not exceed 170 mm and according to DIN 43857. The terminals may be grouped in a terminal block having adequate insulating properties and mechanical strength. The terminal block should be made from best quality bimetallic material to enable good electrical contact and non-hygroscopic, flame retardant material (capable of passing the flammability tests) with nickel plated brass for connecting terminals. It should be rigidly fixed to the base of the meter so that it cannot be separated from the meter base without breaking either the meter base or the terminal block and this fixing arrangement should be in parallel to the meter base in such a way that it cannot be viewed or approached from any part of the meter without breaking the meter.
- The terminals in the terminal block shall be of adequate length in order to have proper grip of conductor. **The screws shall not have pointed ends at the end of threads and shall be (bimetallic) material** of tinned / nickel plated brass to enable a good contact and prevent loosening at heat.
- The terminal should withstand glow wire test at  $960 \pm 15$  °C and the terminal should withstand at least 135 °C. according to EN-IEC 60695-2-10 AND EN-IEC 60695-2-11.

- The terminal cover shall be transparent re-enforced Polycarbonate, Engineering Plastic with minimum thickness 2.0 mm and the terminal cover shall be of extended type completely covering the terminal block and fixing holes. The space inside the terminal cover should be sufficient to accommodate adequate length of external wires.
- The fixing terminal screws must be:
  - M4\*9mm
  - Screw head: 5.5mm
  - Material: brass H62, electroplate nickel
  - Torque: ≥15kgf/min
  - Tension strength: ≥ 440 N/mm<sup>2</sup>
  - Cross recesses for screws of stander: ISO-4757 H2(Z2)
  - Width and depth of cross recesses: not less than 1.2\* 1.1 mm

3.19. To be completed by the Tenderer, only the Reference List Manufacturer are Qualified In this Tender. (schedule No.1)

Item No.	Description	Reference Manufacturer and Place of manufacture	Offered component manufacturer	Offered component place of manufacture	Offered component Name and model
1	SMT Resistance	TDK - Japan			
2	SMT Capacitor	YAGEO - Taiwan			
3	SMT Filter	UniOhm - Taiwan			
4	Electronics Capacitor	Murata - Japan			
5	MCU	Nippon Chemi-Con - Japan			
6	E2PROM	RUBYCON - Japan			
7	FLASH ROM	ST Microelectronics - Europe			
8	CPU	Microchip - USA			
9	POWER REGULATOR	Maxim Microelectronics - USA			
10	CRYSTAL OSCILLATOR	Texas Instruments - USA			
11	Memory	Microchip - USA			
		ON Semiconductor - USA			
		JRC - Japan			
		KDS - Japan			
		<b>MPS -USA</b>			
		SEIKO – Japan			
		Atmel-USA			
		Renesas-Japan			
		Micron-USA			
		FUJITSU-Japan			

12	RAM	Intel-US			
		Qualcomm-US			
		Infineon-Europe			
		FUJITSU-Japan			
		Elpida-Japan			
		Rohm-Japan			
		TSMC-Taiwan			
		Samsung –south Korea			
		Ericsson-Europe			
		Nxp- USA			
13	BATTERY	The supplier should be a regular members  At EUROBAT			

3.20. To be completed by the Tenderer, the supplier of the next components will have apriority in the meter evaluation:  
(schedule No.2)

Item No.	Description	Manufacturer	Place of Manufacturer	Place of Testing & Inspection	Name and model
1	Main board				
2	Power Supply Board				
3	LCD				
4	Push Buttons				
5	Communication Boards				
6	Terminals				
7	meter cover(Case)				
8	terminal cover				
9	Optical Communication port				
10	Cellular Modem				
11	Terminals and screw				

- 2.1. The vendor should determine what type of measurements the meter use CT or shunt resistance or other technology:  
(schedule No.3)

	Measurements type	Supplier name
Phase		
Neutral		

- 2.2. Did the meter have a type test using the same previous components and parts?
- 2.3. During the meter lifetime it doesn't require any calibration or maintenance, stability of meter accuracy should be guaranteed. The lifetime of the meter has to be confirmed by an official organization. A certificate to this effect has to be provided.

### **3. Communications**

- 3.1. The meter shall include two ways IrDA optical communications port (According to IEC62056-21/IEC61107 Mode C). Contractor shall provide software open protocol license which enable the user to make easy read and write from and to the meter with magnetic essay connection probe. And it couldn't be deactivated in any condition; high security data transfer is must and need to be approved.
- 3.2. The meter shall have capability to operate plug and play variable IP 3G 4G modem (according to Jordanian requirements) with removable external antenna that allows two-way communication with the meter using an external modem. According should as per IEC 62056/DLMS HDLC mode) with sealed screw cover and suitable place which is prepared for AMI (Advanced Metering Infrastructure) and provided with all suitable possible bidirectional communication modules to transmit and receive data by means. The meter shall be equipped with a power supply for the modem.
- 3.3. The meter communication protocol shall be an (high security) open protocol according to the IEC62056-21 and DLMS Communication Protocol which accepts the communication with multiple software from different vendors (this should be approved) which enables Automatic Meter Management (AMM) such as (meter reading, parameterization, diagnostic. etc...).
- 3.4. The DLMS certification must be provided to approval that meters are passed DLMS test.
- 3.5. The meter preferred to be able to be capable to connected with HHU via optical to make (setting, upload, Download ...etc.).
- 3.6. The modem antenna preferred to have both option internal or external and the meter should be ready for both and the internal antenna should be completely inside the meter case.
- 3.7. The meter must to be equipped to generate a last gasp message (outage notification) for power loss and to save the event into memory and deliver the message to the AMI network before enter. The low power mode.
- 3.8. The metre /modem should have capability to push pre-selected event to the Headend system immediately after it registered in the meter, this feature should have program to control it regarding to the required event, queue control .... Etc.

3.9. Input/output module: Maximal combination is 1 input and 1 output. Input to monitor and control a cabinet door (record opening and closing events) and output to connect and control mortise MCCB using suitable way and it should be explained and approved. Input and output are freely Programmable.

## **5. Meter software:**

- 5.1. The meter's software shall be supplied with the meters with open license and security keys and programming cable for at least 15 users, this software should be user-friendly including all controllable parameterization features such as multi-level of security for downloading and uploading the data USB key is required.
- 5.2. The software module preferred to be upgraded or modified upon IDECO requests without extra charges while IDECO owns all software management properties.
- 5.3. The software shall be submitted with very detailed user manual along with the sample which should be submitted with the offer this software should have individual user accounts and it should communicate with the meters using IR,
- 5.4. The meter software is preferred to have the ability of programming number of meters connected to the system remotely at once, monitor and configured at same time.
- 5.5. The meter shall be able to store all events happened with their time stamp in the log book such as (power up, power down, tampering events, over voltage... etc.). This event parameter should be programmable for the value and the duration (for some event like over voltage or sag .... etc.) which should be up to 60 minutes' interval.
- 5.6. The vendor shall provide IDECO with any needed support to program IDECO HHU to control the meter upon IDECO request with the same modification condition in point 5.1.
- 5.7. The software highly preferred to connect to the meters remotely through GPRS, and the tenderer should supply all the required to run the software using IDECO servers to support all the supplied quantity of meters.
- 5.8. The meter firmware should be upgrade remotely with all required security stages

## **6. Anti-tampering features**

- 6.1. The meter shall be a high-level anti-tampering. This meter should detect and record the energy (energy recording in such cases should be fully explained from the tenderer and approved by IDECO) and event with time stamp for the following tampering cases:
  - Disconnecting one or more phases.
  - Bypassing the meter by connecting or jumper C.T. terminals.
  - Switching between phases.
  - Neutral connection removed
  - Invert or reverse the C.T. terminals.
  - High magnetic field exposure.
  - Main and terminal cover opening.



- Other anti-tampering features are highly preferred.
- 6.2. The meter shall be completely tamper proof design and construction, facilitated with up-to-date anti- Fraud protection with all fraud events that shall be record in meter's history in the log book with their time stamp.
  - 6.3. The meter records the accurate consumption under reverse run on 15.8.0 conditions but the meter Should register import on 1.8.0 and export energy on 2.8.0.
  - 6.4. The meter should not be influenced by external strong magnetic fields or electrostatic DC discharge up to 100 KV.
  - 6.5. In addition to mentioned alarm flags the meter preferred to have Alarm LED and it preferred to be Programmable when it should be on, IDECO shall approve this operation.
  - 6.6. The meter preferred to have the energy Hiding feature as the following: when the meter have Main Cover Open Event a timer will starts for 300 hour, Therefore, at the end of this timer the meter will change the display on the screen to be Current time (hh:mm:ss) OBIS 0.9.1 instead of OBIS 15.8.0, In addition, the timer can be reset and disabled using PC software.

## **7. Electrical features and certifications:**

- 7.1. Type test Certificate should be shown for the same meter accepted lab which shown in 7.14 and The tenderer should fill the next table: (schedule No.4)

Test name	Test lab	Test date	Test result
Tests of the mechanical properties			
Tests of climatic influences			
Accuracy measurement at different loads			
Effect of change of influence quantities on accuracy			
Effect of short-time overcurrent on the accuracy			
Self-heating			
Power consumption of the voltage and current circuits			
Fast transient burst test			
Electrostatic discharges			
Immunity to electromagnetic RF fields			

Immunity to conducted disturbances induced by RF fields			
Interference measurement			
Voltage dips and short interruptions			
Surge immunity test			
Insulation			

- 7.2. IDECO could witness in house type test in the factory.
- 7.3. The tenderer/maker of the meters offered shall supply proof that he has been manufacturing meters similar to those specified in this document, for at least 4 years.
- 7.4. The Tenderer shall submit with his offer a list of supply Authorities using similar meters to those offered as references and the current re-certification period required by law in the country of manufacturer.
- 7.5. The tenderer/maker of the meters offered shall supply proof that his meter is used on third party MDM and a letter from the customer should be present in the offer.
- 7.6. The meter shall not be affected by power failure, as it contains early detection means of power failure, which permits control circuits to store consumption data, and configure the circuit for this failure.
- 7.7. The Tenderer must submit with his offer all the specifications, software manual, indicating ratings, weights, dimensions and time current characteristics of the offered materials.
- 7.8. However, according to the local rules it must be possible to do regular checking / testing at site with on-site test equipment.
- 7.9. Any presented certificates or approval.etc., requested in this tender must be for the same and exact offered meter without any deviation and it should be Issued by an accredited body from ILACE (is the international organization for accreditation bodies)
- 7.10. The tenderer should fill the next table:  
(schedule No.5)

No.	Component	Presented/Not Presented
1	Type Test Of Energy Meters	
2	Certificate Of Predicted Lifetime For Meter	
3	Proof Of LIFETIME For Battery & LCD	
4	DLMS Certification	

## 8. Meter test:

- 8.1. All meters supplied against the requirements of this specification will be tested before transfer to storage on IDECO Meter Test Bench, and should any meter found to be outside the specified accuracy tolerance, it will be rejected and the contractor shall supply the relevant number of replacement meters at no cost to the purchaser.
- 8.2. The meters shall be factory-calibrated and tested under conditions according to IEC62052- 11 so that when they are tested under the reference conditions stipulated in IEC Standards, the percentage errors shall be far within the limits as specified in IEC. Should the meters be re-tested for at a later date, the difference in accuracy readings between the first and second tests shall not exceed 1%. Furthermore, the meters shall be capable of being transported by road to the purchaser's Test Station in Irbid without losing their calibration.
- 8.3. Power Losses: The losses in each voltage and current circuit shall be measured under reference condition to prove compliance with IEC Standards.
- 8.4. Heating and Dielectric Tests: Tests shall be carried out to establish compliance with the requirements of IEC Standards. Where these tests have already been carried out on meters identical in design and specification to those included in this contract then full details may be submitted of approval by the Engineer in of type testing.
- 8.5. Accuracy: Under the condition set out in IEC Standards and after being energized for the appropriate period state therein, the meters shall be listed to establish that the actual percentage error values fall within the limits as set out in IEC of these specifications.
- 8.6. The mean temperature co-efficient shall be determined for the reference temperature and shall be within the limits. The variations due self-heating should be determined.
- 8.7. Insulation Test.
- 8.8. The meters shall be tested at pressure of 4kV for a period of 1 minute between all live terminals and earth.
- 8.9. **Any other type or routine test can be requested by IDECO to do it in the factory or/and to get certification.**

## 9. **Property Plates:** The meters shall be provided with laser printed label(s) detailing the following:

- 9.1. Meter Type
- 9.2. Manufacturer and year of manufacturing
- 9.3. Voltage, phase(s), wire(s)
- 9.4. Meter Current
- 9.5. Frequency
- 9.6. Accuracy class
- 9.7. Number of pulses per KWH, KVARH
- 9.8. The words "Property of Irbid District Electricity Co. LTD"
- 9.9. The plate shall carry a serial number (supplied by the purchaser). It shall specify the contract No. (IDECO-XX/20XX), and the year of manufacturing, the plate shall also carry a separate serial number from (0000000000) to (0000000000) (the numbers will supplied by IDECO to the factory)

- 9.10. IDECO contract no. **XX/20XX** and stock code 6625-2157.
- 9.11. All packing cartoons and wooden boxes shall carry IDECO contract no. **XX/20XX**
- 9.12. Flags numbers for tampering indication as in section 6.1, 6.2 (to be approved by IDECO)
- 9.13. Previous data in all Items could be change upon to IDECO request before manufacturing and the manufacturer should have IDECO acceptance on it before manufacturing.

## **10. Sample meters and its Software:**

- 10.1. Non-returnable Sample meter identical to the offered designs must be hand-carried and submitted with the Tender within 15 days from tender closing date with a presentation at IDECO office
- 10.2. These representative samples will be closely examined and will undergo mechanical, electrical and accuracy tests at the IDECO Test Station in Irbid. Failure of the samples to meet the mechanical, electrical and tender Specifications set out in this Document will entitle the Purchaser to reject the meter. And this sample must comply with all tender requirements.
- 10.3. These samples shall be programmed to meet the previous IDECO Tariff scheme and features.
- 10.4. Full programming software with manual should be submitted with the offer.
- 10.5. Real time AMI presentation.
- 10.6. Any other related mentioned point in the tender shall be in the presentation.

## **11. Advanced metering infrastructure (AMI) (Headend): it must include with meter lump sum price not separate item**

**The Tenderer should supply a compatible (lifetime free license for the supplied meters) automatic meter infrastructure software (AMI) with the ability to run all the supplied quantity of meters with online support after installation and it shall have the following specifications:**

- 11.1. The system must detect any new meter automatically
- 11.2. The system shall monitor all the registers and readings for all the supplied quantity of meters.
- 11.3. The system shall monitor all type of events and alarms, with integrated alarm system.
- 11.4. The system shall have the ability to control the relay from disconnecting and reconnecting, and read relay status.
- 11.5. The system shall have the ability to export reports for all the mentioned data above.
- 11.6. The system shall have the ability to save a historical data for all the mentioned data above and save the customer details.
- 11.7. This software must be installed in IDECO Servers by the tenderer. And the tenderer shall provide all the support that IDECO needs to run the software.
- 11.8. The system should monitor the online and offline status for all supplied quantity of meters.
- 11.9. The system should provide data about online and offline history.

- 11.10. There shall be a way to import meters to system from excel or other databases.
- 11.11. The system shall have the ability to manage customer information along with meter numbers.
- 11.12. The system shall have the ability to program multiple meters altogether with single order.
- 11.13. Free two-year technical support is required.
- 11.14. The supplier should be responsible to install the software in IDECO server with in site training for IDECO engineer
- 11.15. The system must have the ability to present customizable data for all meters on same page for purposes of printing and reporting.
- 11.16. The system must support Arabic characters in customer information.
- 11.17. The system must have non-archive page to show all the meters which trying to connect to system without being archived.
- 11.18. The system must have a page to show meter connection status and categorized to the following (online, never online, never offline, ever offline, 24 hours offline, 6 hours offline, 1 hour offline).
- 11.19. The system should have tree power losses calculation:
- 11.19.1. The user must be able to create a Line in which the user will specify the meter/meters at the beginning of the line (Check Meter/Meters) and also specify the meter/meters at the end of the line (Main Meter/Meters). This line model will not affect the original place of meter in AMI tree.
- 11.19.2. The line loss will be the difference between the (Check Meter/Meters) and (Main Meter/Meters) using the formula stated below.
- 11.19.3. The system must have another window to display the results which contains the following table for selected line/lines:

No.	Time	Active(Imp)(kWh)							
		Start Energy Check	End Energy Check	Total Energy Check	Start Energy Main	End Energy Main	Total Energy Main	Total Loss(kWh)	Total Loss Rate%
1	Date/Time	50	250	200	100	275	175	25	12.5%
2	Date/Time			= End Energy Check - Start Energy Check			= End Energy Main - Start Energy Main	=Total Energy Check - Total Energy Main	= 100 * Total Loss(kWh) / Total Energy Check

- 11.19.4. Graphs that has the following data:
  - a. Total Energy Check
  - b. Total Energy Main
  - c. Total Loss (kWh)
  - d. Total Loss Rate %
- 11.19.5. The table and graphs must be in the same window with the ability to choose the starting and ending date/time and the data could be displayed (by hour, by day, by month, by year)
- 11.19.6. The system must support multiple meters in check side and support multiple meters in main side.
- 11.20. The system must be able to display all mentioned data above as (by hour, by day, by month, by year).
- 11.21. The system must have (Non Archive Page) that will display the list of meters that are trying to connect to the system with no added archive.
  - 11.21.1. The page must have the following data:
    - a. Meter Number.
    - b. Last communication date and time.
    - c. First communication date and time.
    - d. IP address and Port.
  - 11.21.2. The page must have an option for selecting meters from the list (using checkbox) and then add the archive for these selected meters (import to AMI) via pop-up window where we can select the archive parameters like (where to add, meter type, task, etc...)
  - 11.21.3. the meter must get erased from this list after importing.
  - 11.21.4. The system must be able to report all data in this page.
- 11.22. The system shall be able to change the meter security password automatically when the meter connects to the AMI system for the first time. The new passwords will be pre-configured by the user and then selected in the meter archive.
- 11.23. The system should have a page to manage automatic task which must have the following features:
  - 11.23.1. Task list with detailed parameters regarding data intervals and time of execution.
  - 11.23.2. Real-time reports about task status (running/successful/failed/stopped) for all list of metres and connection status with percentage of data collections. And this page must have control button to (run/stop/pause/re-run) the task for any selected meter/s (using checkbox).
  - 11.23.3. Temporary task or recall task must be available and could be applied to a number of selected meters (using checkbox) for a selected period of time.
- 11.24. The system must have a page for RTC synchronization in which the user can give sync order to a number of selected meters (using checkbox).
- 11.25. The system must have a log of all user operation as the following operations:
  - 11.25.1. Disconnect and connect orders with timestamp, username and meter number.
  - 11.25.2. Meter archive add/import with timestamp, user name and meter number.

11.25.3. Meter archive remove with timestamp, user name and meter number.

11.25.4. Programming event with timestamp, user name, meter number, type of programming, detailed parameter of programming.

11.26. The system must have a tree model in which meters will be categorized as per IDECO indexing system with 3 level. And the system must have a page to move a selected number of meters (using checkbox) from a tree branch to another.

11.27. The vendor must provide full support to integrate HES (AMI) with our workflow system to be able to do these functions from our workflow system via API web-service

- Connect relay.
- Disconnect relay.
- Read relay status.
- On-demand reading energy registers.
- any other needed functions.

## 12. Modem

12.1. The meter should have plug and play 3G 4G modem and it's highly preferred to be with built in Chip Card instead of sim card and this chip card must have the ability to work with any present Cellular Internet provider in Jordan (provider changing will depend in the contract period) the modem and Internal antenna (if used) should be fully covered

12.2. External antenna should have supplied with each modem

12.3. The vendor should complete the next table

Schedule no. 6

Specification	Cellular Modem	Modem chip card
Operating temperature		
Storage temperature		
Operating System		
Supply Voltage		
Communication protocol		
PPS procedure		
EEPROM sizes		
Authentication algorithm		
Symmetric algorithms		
Hashing functions		
SW & HW Counter-measures		

12.1. The tenderer should fill the next table: (schedule No.7)

No.	component	Presented/Not Presented
1	Test Certificate for the Modem	
2	Certificate Of Predicted Lifetime For Modem	

## **14. Special Requirements**

The Below mentioned requirements shall have a precedence in all of the preceding specifications and requirements, and the tenderer is kindly requested to strictly follow.

- 12.2. Full free software training for 2 IDECO engineers.
- 12.3. The tenderer should supply 15 optical probe and 15 USB key with the tender
- 12.4. Each shipment required based on (request for delivery) shall be inspected in country of origin by IDECO engineers, and all Inspection Costs (Visa, Air Tickets, very good ranking Hotel, Accommodation, Transportation, etc.) should be mentioned in the tender per engineer per visit so it shouldn't be included with the offer price. And it should include the trip plane with time schedule
- 12.5. If a visit to a factory is required for evaluation purposes before signing the agreement, the tenderer should do all necessary arrangement for this visit; the related cost of visit by IDECO team will be borne by the manufacturer (this will have related to the vendor acceptance and it should be mentioned in the offer)
- 12.6. The vendor is highly preferred to have supplied at least 100000 meter of the same type for Middle East or Europe or USA market and that should be approved by customer latter.
- 12.7. The meter preferred to have the following sticker with size of 8 cmx3cm on the both side of the meter (in the main cover) and it should be paper with PE layer cover and it Must be resistant to moisture and water and it should be cracked and damaged if the main cover removed for one-time so the sticker will be rejected if the meter could be open (in any way) without crack the sticker. (Refer to IDECO for a softcopy of the seal).



كهرباء إربد  
Irbid Electricity

تنبيه عام



إن فتح غطاء العداد قد يعرضك للغرامة المالية والمسائلة القانونية وقد  
يعرضك لخطر الصعقة الكهربائية.

- 12.8. The meter programing and configurations should be approved by IDECO engineer before shipping.
- 12.9. The manufacturer should provide all physical and technical specifications for all kind of modems, and the meter shall be compatible with other kinds of modems.
- 12.10. The tenderer should include PDF (text) softcopy (not scanned) for the technical offer.
- 12.11. The vendor should supply all needed support to run the meter on third party MDM.



## Technical particulars for three phases CT meter (To be completed by the Tenderer)

(schedule No.8)

NO.	Description	Unit	
1	Name of manufacturer		
2	Country of origin		
3	Type of meter		
4	Manufacturing License		
5	Quality Assurance certificate		
6	Standard IEC No		
7	Operating Ranges :		
8	Temperature	C°	
9	Humidity	RH	
10	Rated Voltage	V	
11	Basic Current Max current	Amp	
12	Starting current of Ib	Amp	
13	Short circuit current	Amp	
14	Active energy class of meter		
15	Reactive energy availability in load profile		
16	AC Withstand voltage for 1min IEC No	KV	
17	Impulse withstand voltage 1.2/50 Micro seconds IEC No	KV	
18	Burst Test IEC No	KV	
19	Total power consumption	VA	
20	Power consumption in voltage circuit	VA	
21	Power consumption in current circuit	VA	
22	Power consumption in modem circuit	VA	
23	Meter constant	Imp per kWh	

24	Meter dimensions	
25	Material of terminal block connectors	
26	Meter weight	Grams
27	Degree of Protection	
28	Is the meter equipped with phase failure Indicator on LCD?	
29	Is the meter equipped with Reverse run Indicator on LCD?	
30	Is the meter equipped with phase rotation Indicator on LCD?	
31	Is the meter equipped with energy direction status Indicator on LCD?	
32	Is the meter equipped with Communication Indicator on LCD?	
33	Is the meter equipped with low battery Indicator on LCD?	
34	Is the meter equipped with terminal cover removing record indicator on LCD?	
35	Is the meter equipped with bypass indicator on LCD?	
36	Could the meter be extended for repayment?	
37	What is the IP of the meter?	
38	Software Features	
39	Is the software upgrade free of extra charge	
40	All software features shall be provided in tender offer and in the following rows	

## Special Requirements

The Below mentioned requirements shall have a precedence in all of the preceding specifications and requirements, and the tenderer is kindly requested to strictly follow.

1. The manufacturer has **shall** print on suitable metal name plate for the required materials the following message:
  - IDECO Contract No. **(50/2021)**. Purchase order No. ( ).
  - Stock code as seen in the invitation to tender table no.2 – page (3).
  - manufacture name, manufacturing date, Serial number, Country of origin, QR code contains the above message.
2. Maintenance instructions: Where the equipment / materials supplied are subject to maintenance during service the manufacturer shall submit for approval a draft of the recommended maintenance instructions. After approval the supplier shall supply any further copies required by the Engineer. These maintenance instructions shall be provided before the taking over of any part of the equipment.
3. Catalogues: a set of the manufacturer's catalogues shall be attached to the tender.
4. The manufacturer shall to submit with his offer reference list for his product for the last ten years ago.
5. The required materials in each purchase order shall be inspected by two IDECO's engineers in the country of origin of the required materials, and all related Inspection Costs (Visa, Air Tickets, Hotel, Accommodation, Transportation, etc.) of at least (2) IDECO representative engineers, at the manufacturer factory, to ensure the proper handling and operation of the supplied materials shall be borne by the contractor.
6. When the visit to a factory for evaluation purposes before signing the agreement is required, the tenderer must do all necessary arrangement for this visit; the related cost of visit by IDECO team.
7. **The required materials shall be inspected by calibrated equipment test by authorized party.**
8. The contractor shall nominate third party laboratory and cost of inspection by third party as shown in **Schedule No. 11**, in case the attendance of ideco engineers is not applicable due to any reason.
9. The material safety data sheet (MSDS) of all equipment / materials is required to be submitted with the offer.
10. The technical drawing approval shall be submitted during 7 days from order letter date, any delay in this period from contractor side, the delivery period will start after 7 days from order letter. (In case the contractor offered delivery period from order letter date and drawing approval).
11. **The purchaser has the complete right to reply on contractor's clarifications during 7 days, and during this period there is not exemption from incurred penalty for the event.**
12. After Awarding Tenders, winner tenderer will be assessment according to quality of good, delivery period, service after sale, and assessment weight will be considered in coming tenders' evaluation.
13. Euro one certificate shall be submitted during clearance process, in case the country of origin of the required materials from Europe countries.
14. The manufacturer shall print 128 c bar code in each item as below shape, and bar code character will be submitted to manufacturer at awarding date.



## Manufacturing and Delivery

- ✓ Below schedule shall be completed by the tenderer and the periods entered shall be binding on the contractor. All periods entered below are to be in weeks and relate to the placing of the contract. Material shall be shipped uniformly throughout the contract.
- ✓ The tenderer shall determine the minimum value per each purchase order, and determine the number of times purchase orders can be delivered within two years. And the priority will be given to tenderer who minimize the purchase order value and maximize the number of purchase orders.

### Schedule 9 (Manufacturing & Delivery)

<b>Required</b>	<b><u>Data for item (1)</u></b> ❖ (400V L-L), THREE PHASE ELECTRONIC METER, (5)10 A, Multi Tariff (4 Tariffs), Class 0.5s KWH, Class 1 KVARH, 4-wire C.T operated with cellular <b>3G 4G</b> modem.
Manufacturer	
Manufacturing Place	
Inspection Place	
No. of purchase orders within 2 years	
Manufacturing Period and Delivery ( week) to ..... from purchase order date	
Minimum quantity per each purchase order.	
Maximum quantity per each purchase order	

## Price Summary

- The tenderer shall enter in the appropriate columns of this schedule the prices at which each item will be supplied. Prices shall include shipment and delivery to the selected destination seen below based on the following selected transportation obligations.
- transportation obligations shall be indicated by **putting a tick** at the proper following choice:  
 CFR - Aqaba Port       CPT- Amman Customs       CPT- IDECO Stores
- IDECO Company is not exempted from custom duties, sales taxes, import license fees and any other tariffs.
- The tenderer is required to fill in the below table for **quoted price** based on the fixed price for required materials, and the offered price shall valid during two years.

### Schedule (10)

No.	Quantity (PCS) Within 2 years	Material	Unit Price Currency .....	Total Price Currency .....
1.	2660	(400V L-L), THREE PHASE ELECTRONIC METER, (5)10 A, Multi Tariff (4 Tariffs), Class 0.5s KWH, Class 1 KVARH, 4-wire C.T operated with cellular <b>3G 4G</b> modem.		
<b><u>Total Contract Price (in words)</u></b>				
<b>Minimum value per each purchase order (currency .....</b>				
<b>Maximum value per each purchase order (currency .....</b>				

Name(s) of Sureties:

Name(s) and Address of Tenderer:

Tele / Fax:  
Signature:

Answer Back Code:  
Position of Signatory:

## Inspection Details

- In case of foreign material origin, and inspection of material is required, the bidder shall fill up the following table.
- The inspection is required for each purchase order and for 2 IDECO Engineers at least, and the cost shall be borne by the contractor until otherwise agreed.

### Schedule No.11

NO.	Description	Cost
1	Inspection cost in the country of origin per engineer. (If not included in the main offer).	
2	Air flight class	
3	Transportation cost during the period of inspection (Included/not included)	
4	Residential Hotel Rank	
5	Daily meals (included/Not included), Number of meals.	
6	Third party for inspection	
6.1	Third party name	
6.2	Inspection cost by third party	

## Main Offer details

- The bidder shall fill the following table otherwise his offer may be not considered.

### Schedule No.12

NO.	Description	
1	Value and currency of Bid Bond	
2	Payment method (open account/ LC/ Other)	
3	Offer validity	

## Tender Agreement Summary

### Tender No. (50/2021)

Dear Sir;

1. Having examined the conditions of Contract, specification and schedule for the above Works, the undersigned, offer to manufacture, supply, work, test, and deliver the said works described in the specification and schedules and in accordance with the said conditions of contract, for the sum of .....or such other sum as may be ascertained in accordance with the said conditions.
2. We agree that this tender shall be held open for acceptance or rejection for the validity period of **120 days** from the date fixed for opening tenders and it shall remain binding upon us and may be accepted at any time before the expiration of that period.
3. Unless and until a formal agreement is prepared and executed, this tender, together with your written acceptance thereof, shall constitute a binding contract between us.
4. If our tender is accepted, we will deliver to Irbid District Electricity Co. Ltd. Within **(30) days** of being called upon to do so a performance bond by bank or insurance company (to be approved in either case by the purchaser) to be jointly and severally bound with us in a sum equal to **10%** of the value of the contract. The form of the performance bond will be as attached hereto. We propose the following Bank or insurance company as surety (or sureties) in this respect: -  
.....
5. We undertake if our tender is accepted and on receipt of your acceptance to commence and manufacture, works test, and complete for delivery **ex-works** the whole of the Works offered within (.....) weeks calculated from the date of **Order Letter Awarding**, and to deliver on the dock at (.....port) - Jordan the whole of the works offered within a further (.....) weeks, or to **IDECO stores** within a further (.....) weeks.
6. We undertake to insure the materials against all risks from the time they leave the works until they are placed on board ship. We understand that marine insurance will be effected by Irbid District Electricity and we will provide details of the materials to be shipped in good time for Irbid District Electricity to arrange for the said marine insurance.
7. A guarantee Period will apply to each section of the works of fifteen months from the date of dispatch ex-works or twelve months from the date of setting to work whichever shall be the later.
8. We understand that you are not bound to accept the lowest or any tender you may receive.

Dated this .....day of / / 2021.

Signature.....in the capacity of .....

Duly authorized to sign Tender for and on behalf of.....

Address..... Occupation.....